
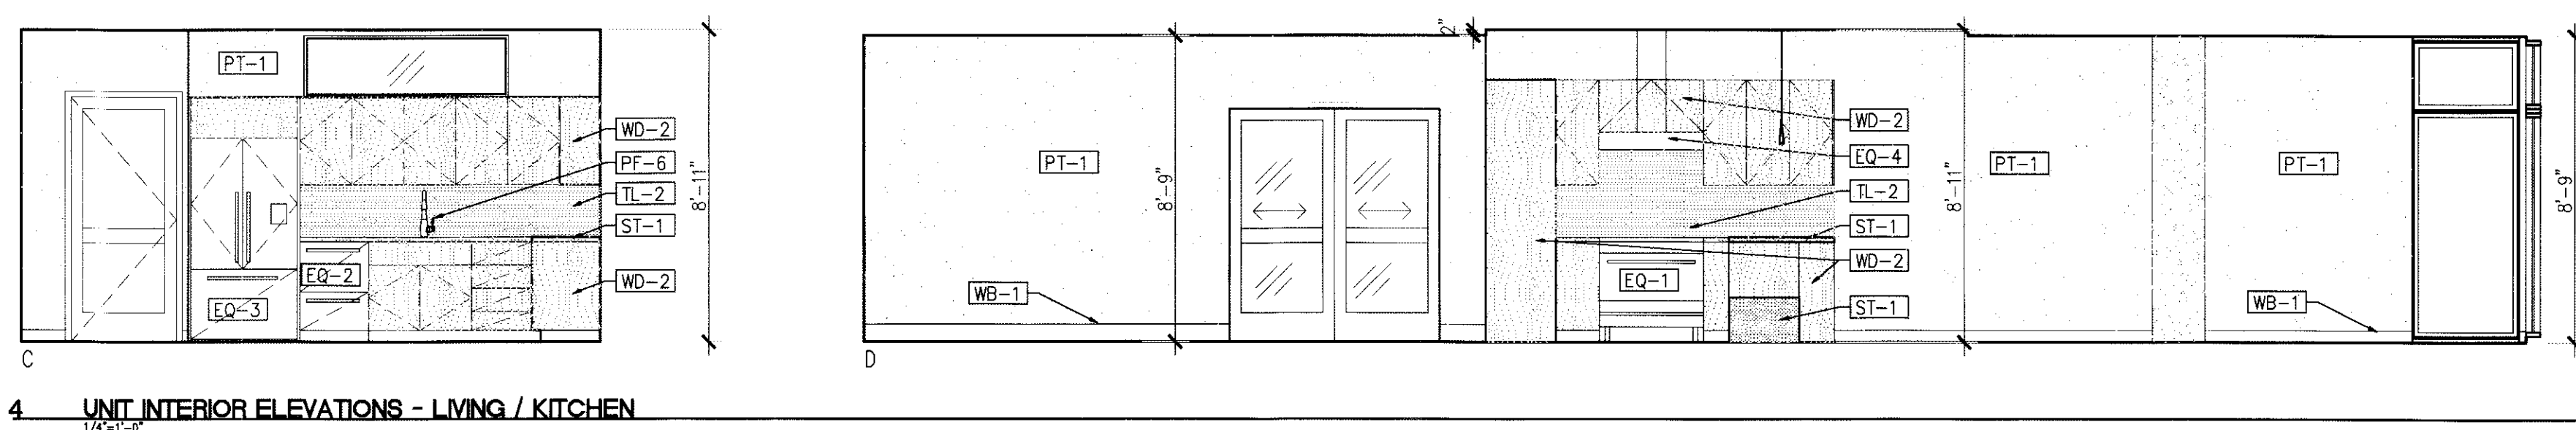
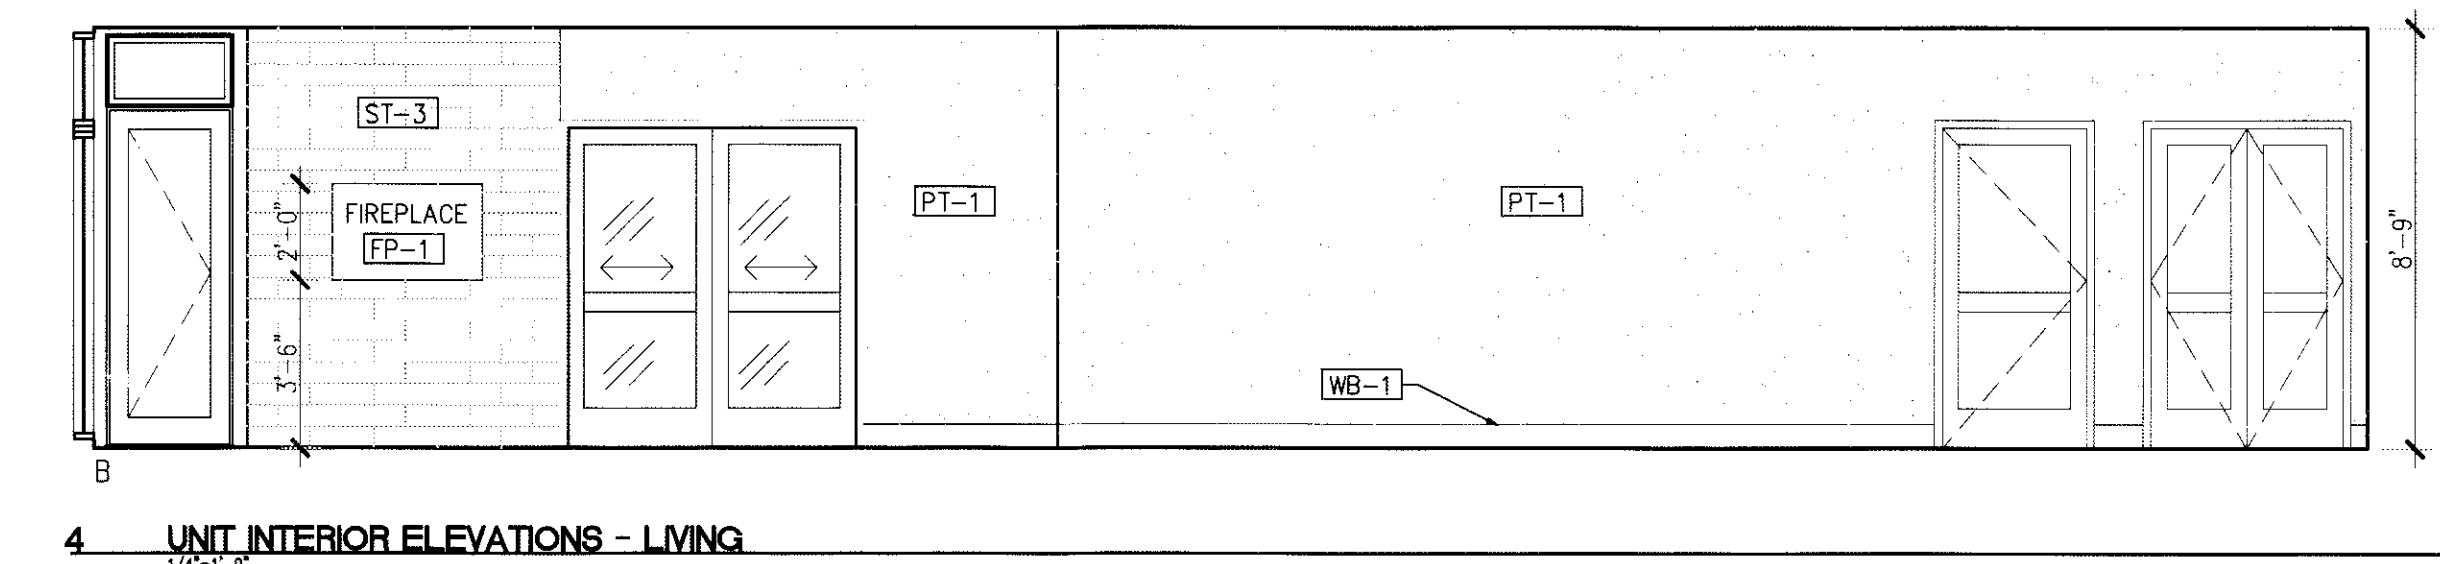


FIXTURE/FINISH SCHEDULE						
TAG	ITEM	MANUFACTURER	PART/MODEL#	FINISH	SUPPLIER	CONTACT
CP-1	BEDROOM CARPET	XXX	XXXX	XXX	SURFACE	
EQ-1	36" GAS RANGE	FISHER & PAYKEL	OR36SDBGX1	STAINLESS STEEL	KELLY'S	
EQ-2	DRAWER DISHWASHER	FISHER & PAYKEL	DD605FD	STAINLESS STEEL	KELLY'S	
EQ-3	FRENCH DOOR REFRIG	FISHER & PAYKEL	RF201ADUX	STAINLESS STEEL	KELLY'S	
EQ-4	36" HOOD	BROAN	AP136SS	STAINLESS STEEL	KELLY'S	
EQ-5	COMPACTOR	BROAN	1052	STAINLESS STEEL	KELLY'S	
EQ-6	STACKED WASHER/DRYER	FRIGIDAIRE	GLTF2940FS & GLEQ2152ES	STAINLESS STEEL	KELLY'S	
FP-1	THRU FIREPLACE	HEAT & GLO	ST-550	XXX	HOME FIRE STOVE	
PF-1	BATHROOM SINK	XXX	XXXX	XXX	KOHLER	
PF-2	BATHROOM FAUCET	XXX	XXXX	XXX	KOHLER	
PF-3	BATH & SHOWER HEAD	XXX	XXXX	XXX	KOHLER	
PF-4	TOILET	XXX	XXXX	XXX	KOHLER	
PF-5	BATHTUB	XXX	XXXX	XXX	KOHLER	
PF-6	KITCHEN FAUCET	XXX	XXXX	XXX	KOHLER	
PF-7	KITCHEN SINK	XXX	XXXX	XXX	KOHLER	
TB-1	TOWEL BAR	XXX	XXXX	XXX	XXXX	
PT-1	TYP WALL PAINT	XXX	XXXX	XXX	SURFACE	
PT-2	BEDROOM WALL PAINT	XXX	XXXX	XXX	SURFACE	
PT-3	TYP CEILING PAINT	XXX	XXXX	XXX	SURFACE	
PT-4	BATHROOM PAINT	XXX	XXXX	XXX	SURFACE	
ST-1	KITCHEN COUNTER	XXX	XXXX	XXX	SURFACE	
ST-2	BATHROOM COUNTER	XXX	XXXX	XXX	SURFACE	
ST-3	FIREPLACE SURROUND	SLATE	XXXX	XXX	SURFACE	
ST-4	NICHE/FEATURE WALL	XXX	XXXX	XXX	SURFACE	
TL-1	BATHROOM TILE	XXX	XXXX	XXX	SURFACE	
TL-2	KITCHEN BACKSPLASH	XXX	XXXX	XXX	SURFACE	
WD-1	WOOD FLOORING	XXX	XXXX	XXX	SURFACE	
WD-2	KITCHEN CABINETS	XXX	XXXX	XXX	SURFACE	
WD-3	BATHROOM CABINETS	XXX	XXXX	XXX	SURFACE	
WB-1	WALL BASE	XXX	XXXX	XXX	SURFACE	

DOOR SCHEDULE										
TAG	SPACE	TYPE	FRAME	WIDTH	HEIGHT	PART/MODEL#	FINISH	HARDWARE	SUPPLIER	CONTACT
402A	ENTRY	WD SOLID	XXX	3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402B	CLOSET	WD SOLID	XXX	(2) 2'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402C	BATHROOM	WD SOLID	XXX	3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402D	LAUNDRY	WD BIFOLD	XXX	3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402E	MASTER CLOSET	WD POCKET	XXX	2'-6"	7'-0"	XXX	XXX	XXX	XXX	XXX
402F	MASTER BEDROOM	WD SLIDER	XXX	(2) 3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402G	MASTER BEDROOM	WD SLIDER	XXX	(2) 3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402H	MASTER BEDROOM	WD SLIDER	XXX	(2) 3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX
402I	MASTER BEDROOM	WD SLIDER	XXX	(2) 3'-0"	7'-0"	XXX	XXX	XXX	XXX	XXX

REILTE SCHEDULE										
TAG	SPACE	GLAZING	FRAME	WIDTH	HEIGHT	PART/MODEL#	FINISH	HARDWARE	SUPPLIER	CONTACT
402A	DEN/KITCHEN	XXX	XXX	5'-10"	1'-9"	XXX	XXX	XXX	XXX	XXX

LIGHTING SCHEDULE					
TAG	ITEM	MANUFACTURER	PART/MODEL#	FINISH	SUPPLIER
⊙	RECESSED	WAC LIGHTING	RSVT-21	CLEAR WHITE FINISH	K&M ELECTRICAL
◇	ADJUSTABLE	WAC LIGHTING	QF-182	PLATINUM FINISH	K&M ELECTRICAL
○	PENDENT	WAC LIGHTING	G913-CF	CLEAR FROSTED	K&M ELECTRICAL
⬇	DOWNLIGHT	WAC LIGHTING	BA-X4	SATIN NICKEL	K&M ELECTRICAL
⬆	MASTER VANITY	FORECAST LIGHTING	F4820-36	SATIN NICKEL	K&M ELECTRICAL
⬆	BATH VANITY	HINKLEY LIGHTING	5923	CHROME FINISH	K&M ELECTRICAL

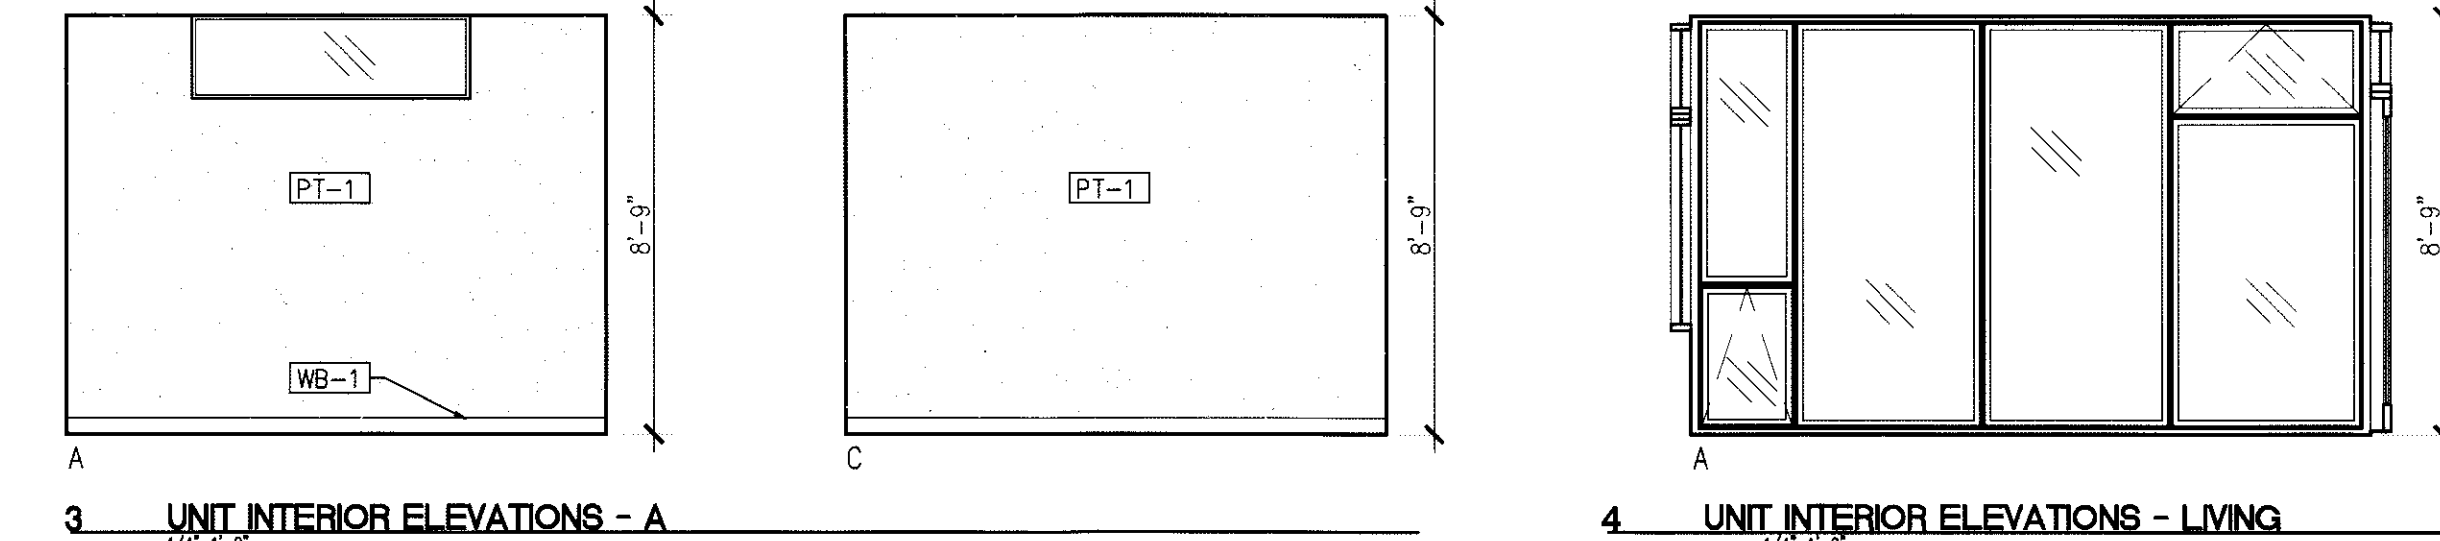

GENERAL NOTES

- A. UNLESS OTHERWISE NOTED, DIMENSIONS ARE TO BUILDING GRID LINES, FACE OF STUD, FACE OF MASONRY, OR FACE OF CONCRETE WALLS.
- B. DOORS AND CASED OPENINGS INDICATED ADJACENT TO WALL INTERSECTIONS SHALL BE LOCATED WITH THE EDGE OF THE FINISHED OPENING FOUR INCHES FROM THE ADJACENT WALL. UNLESS NOTED OTHERWISE INDICATED. ALL OTHER DOORS AND CASED OPENINGS SHALL BE CENTERED BETWEEN NEAREST ADJACENT WALL INTERSECTIONS, UNLESS OTHERWISE DIMENSIONED.
- C. CONDITIONS AND DETAILS MARKED "TYPICAL" SHALL APPLY IN ALL CASES, UNLESS SPECIFICALLY INDICATED OTHERWISE. TYPICAL DETAILS NOT REFERENCED ON DRAWINGS APPLY UNLESS NOTED OTHERWISE BY SPECIFIC NOTES AND DETAILS. WHERE NO SPECIFIC DETAIL IS SHOWN, THE CONSTRUCTION SHALL BE IDENTICAL OR SIMILAR TO THAT INDICATED FOR THE TYPICAL CONSTRUCTION ON THE PROJECT.
- D. INTERIOR UNIT WALLS ARE 4" STUD, EXCEPT AT PLUMBING WALLS, WHICH ARE 6" STUD
- E. UNLESS OTHERWISE NOTED, LIGHTS/CEILING FIXTURES ARE CENTERED BOTH DIRECTIONS

riverfront park llc

designer: amy green
503.438.5411
amygreendesign@gmail.com

riverfront park llc

contractor: ben schouten
503.381.9522
ben.scout@gmail.com

RIVERS CONDOS

156 FRONT AVENUE
SALEM, OREGON
RIVERFRONT PARK LLC
429 COURT ST. NE
SALEM, OREGON 97301

Typ 02

- UNIT FAIR HOUSING REVS 03.26.09
FIREPLACE VENTING REV 03.03.09
UNIT DOOR CHANGES 02.11.09
LEVEL 4 UNIT LAYOUTS 02.09.09

REFER TO SIENNA
DRAWINGS FOR ADDITIONAL
INFORMATION REGARDING
SHELL CONSTRUCTION

Drawn By
AMG

Date
07.30.09

Sheet Title
LEVEL 4:




UNIT 402 LAYOUT

Sheet Scale
AS SHOWN

Sheet No.

A513

Rouge

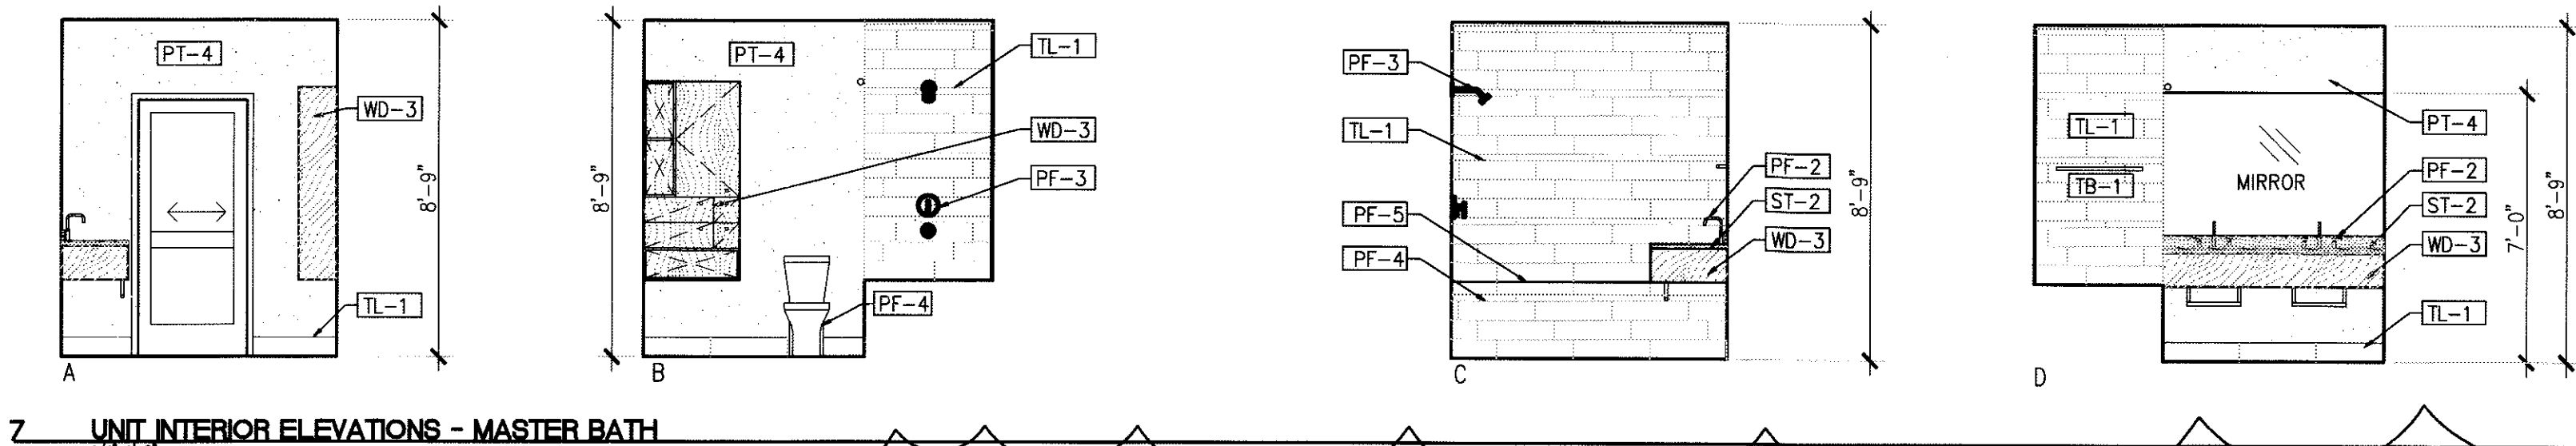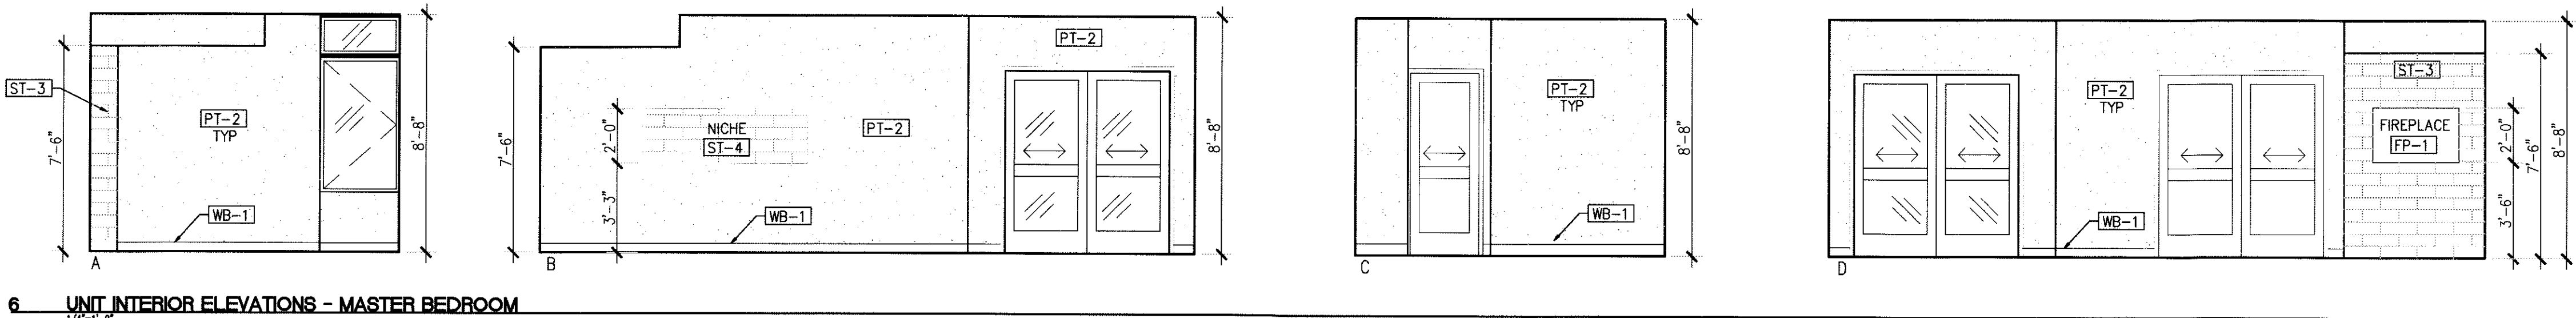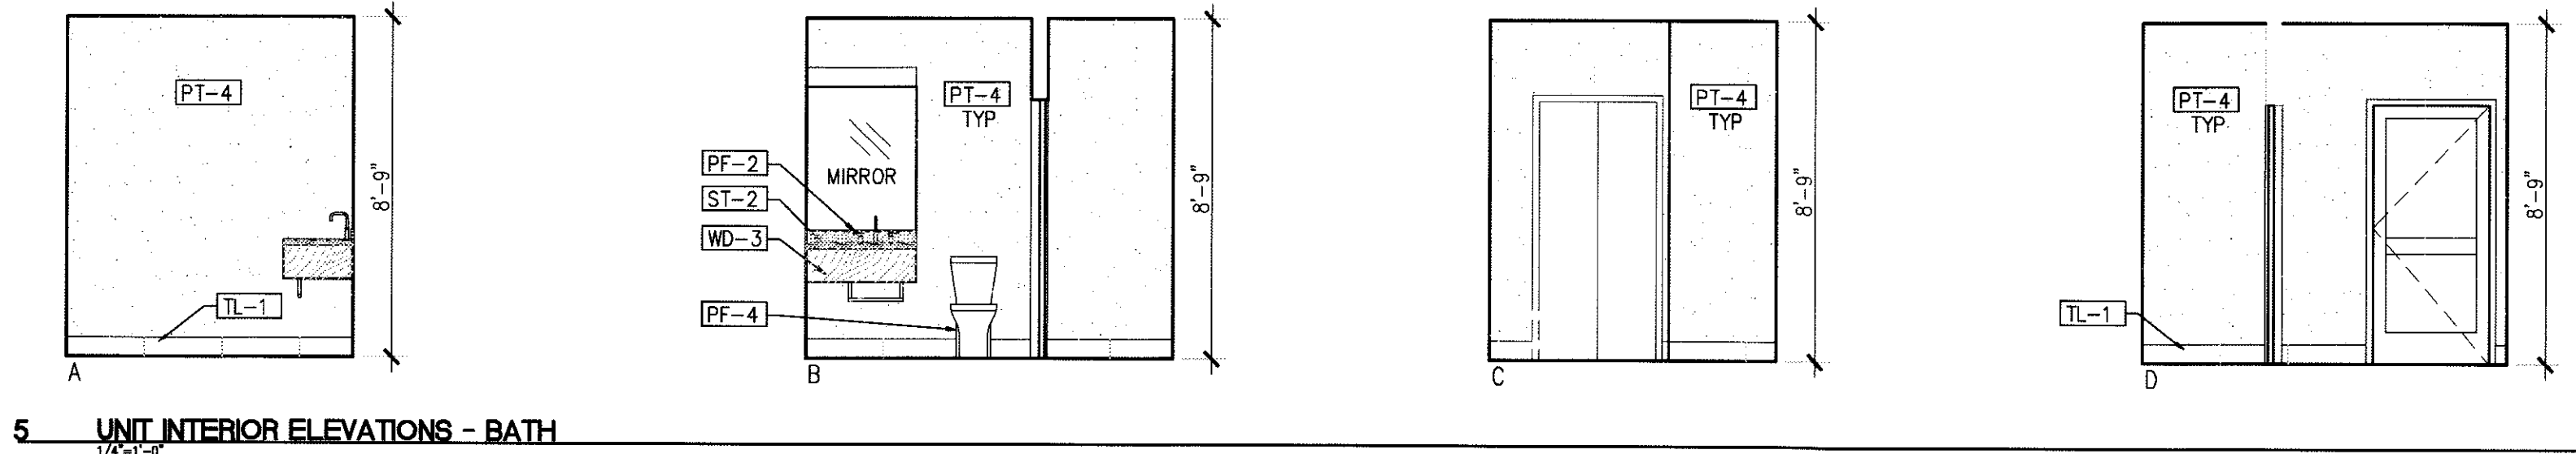

riverfront park llc

designer: amy green
503.438.5411
amygreendesign@gmail.com

riverfront park llc

contractor: ben schouten
503.381.9522
benscout@gmail.com

RIVERS CONDOS

156 FRONT AVENUE
SALEM, OREGON
RIVERFRONT PARK LLC
429 COURT ST. NE
SALEM, OREGON 97301

02
Typ

UNIT 402 REVISIONS 03.26.09

REFER TO SIENNA
DRAWINGS FOR ADDITIONAL
INFORMATION REGARDING
SHELL CONSTRUCTION

Drawn By Date
AMG 07.30.09

Sheet Title
LEVEL 4:

UNIT 402

INTERIOR ELEVATIONS

Sheet Scale
AS SHOWN

Sheet No.

A513.1