

FIXTURE/FINISH SCHEDULE						
TAG	ITEM	MANUFACTURER	PART/MODEL#	FINISH	SUPPLIER	CONTACT
CP-1	BEDROOM CARPET	XXX	XXXX	XXX	SURFACE	
EQ-1	36" GAS RANGE	FISHER & PAYKEL	OR36SDB6X1	STAINLESS STEEL	KELLY'S	
EQ-2	DRAWER DISHWASHER	FISHER & PAYKEL	DD605FD	STAINLESS STEEL	KELLY'S	
EQ-3	FRENCH DOOR REFRIG	FISHER & PAYKEL	RF201ADUX	STAINLESS STEEL	KELLY'S	
EQ-4	36" HOOD	BROAN	AP136SS	STAINLESS STEEL	KELLY'S	
EQ-5	COMPACTOR	BROAN	1052	STAINLESS STEEL	KELLY'S	
EQ-6	STACKED WASHER/DRYER	FRIGIDAIRE	GLTF2940FS & GLEQ2152ES	STAINLESS STEEL	KELLY'S	
FP-1	THRU FIREPLACE	HEAT & GLO	ST-550	XXX	HOME FIRE STOVE	
PF-1	BATHROOM SINK	XXX	XXXX	XXX	KOHLER	
PF-2	BATHROOM FAUCET	XXX	XXXX	XXX	KOHLER	
PF-3	BATH & SHOWER HEAD	XXX	XXXX	XXX	KOHLER	
PF-4	TOILET	XXX	XXXX	XXX	KOHLER	
PF-5	BATHTUB	XXX	XXXX	XXX	KOHLER	
PF-6	KITCHEN FAUCET	XXX	XXXX	XXX	KOHLER	
PF-7	KITCHEN SINK	XXX	XXXX	XXX	KOHLER	
TB-1	TOWEL BAR	XXX	XXXX	XXX	XXXX	
PT-1	TYP WALL PAINT	XXX	XXXX	XXX	SURFACE	
PT-2	BEDROOM WALL PAINT	XXX	XXXX	XXX	SURFACE	
PT-3	TYP CEILING PAINT	XXX	XXXX	XXX	SURFACE	
PT-4	BATHROOM PAINT	XXX	XXXX	XXX	SURFACE	
ST-1	KITCHEN COUNTER	XXX	XXXX	XXX	SURFACE	
ST-2	BATHROOM COUNTER	XXX	XXXX	XXX	SURFACE	
ST-3	FIREPLACE SURROUND	SLATE	XXXX	XXX	SURFACE	
ST-4	NICHE/FEATURE WALL	XXX	XXXX	XXX	SURFACE	
TL-1	BATHROOM TILE	XXX	XXXX	XXX	SURFACE	
TL-2	KITCHEN BACKSPASH	XXX	XXXX	XXX	SURFACE	
WD-1	WOOD FLOORING	XXX	XXXX	XXX	SURFACE	
WD-2	KITCHEN CABINETS	XXX	XXXX	XXX	SURFACE	
WD-3	BATHROOM CABINETS	XXX	XXXX	XXX	SURFACE	
WB-1	WALL BASE	XXX	XXXX	XXX	SURFACE	

DOOR SCHEDULE									
TAG	SPACE	TYPE	FRAME	WIDTH	HEIGHT	PART/MODEL#	FINISH	HARDWARE	CONTACT
403A	ENTRY	WD SOLID	XXX	3'-0"	7'-0"	XXX	XXX	XXX	ABS
403B	CLOSET	WD SOLID	XXX	(2) 1'-6"	7'-0"	XXX	XXX	XXX	ABS
403C	LAUNDRY	WD SOLID	XXX	(2) 2'-0"	7'-0"	XXX	XXX	XXX	ABS
403D	BATH	WD SOLID	XXX	2'-6"	7'-0"	XXX	XXX	XXX	ABS
403E	MASTER CLOSET	WD SOLID	XXX	2'-6"	7'-0"	XXX	XXX	XXX	ABS
403F	MASTER BEDROOM	WD SOLID	XXX	2'-8"	7'-0"	XXX	XXX	XXX	ABS

LIGHTING SCHEDULE					
TAG	ITEM	MANUFACTURER	PART/MODEL#	FINISH	SUPPLIER
⊙	RECESSED	WAC LIGHTING	R5VT-21	CLEAR WHITE FINISH	K&M ELECTRICAL
⊙	ADJUSTABLE	WAC LIGHTING	QF-182	PLATINUM FINISH	K&M ELECTRICAL
○	PENDENT	WAC LIGHTING	G913-CF	CLEAR FROSTED	K&M ELECTRICAL
⬇	DOWNLIGHT	WAC LIGHTING	BA-X4	SATIN NICKEL	K&M ELECTRICAL
⬆	MASTER VANITY	FORECAST LIGHTING	F4820-36	SATIN NICKEL	K&M ELECTRICAL
⬆	BATH VANITY	HINKLEY LIGHTING	5923	CHROME FINISH	K&M ELECTRICAL





GENERAL NOTES

A. UNLESS OTHERWISE NOTED, DIMENSIONS ARE TO BUILDING GRID LINES, FACE OF STUD, FACE OF MASONRY, OR FACE OF CONCRETE WALLS.

B. DOORS AND CASED OPENINGS INDICATED ADJACENT TO WALL INTERSECTIONS SHALL BE LOCATED WITH THE EDGE OF THE FINISHED OPENING FOUR INCHES FROM THE ADJACENT WALL UNLESS OTHERWISE INDICATED. ALL OTHER DOORS AND CASED OPENINGS SHALL BE CENTERED BETWEEN NEAREST ADJACENT WALL INTERSECTIONS, UNLESS OTHERWISE DIMENSIONED.

C. CONDITIONS AND DETAILS MARKED "TYPICAL" SHALL APPLY IN ALL CASES, UNLESS SPECIFICALLY INDICATED OTHERWISE. TYPICAL DETAILS NOT REFERENCED ON DRAWINGS APPLY UNLESS NOTED OTHERWISE BY SPECIFIC NOTES AND DETAILS. WHERE NO SPECIFIC DETAIL IS SHOWN, THE CONSTRUCTION SHALL BE IDENTICAL OR SIMILAR TO THAT INDICATED FOR THE TYPICAL CONSTRUCTION ON THE PROJECT.

D. UNLESS OTHERWISE NOTED, LIGHTS/CEILING FIXTURES ARE CENTERED BOTH DIRECTIONS

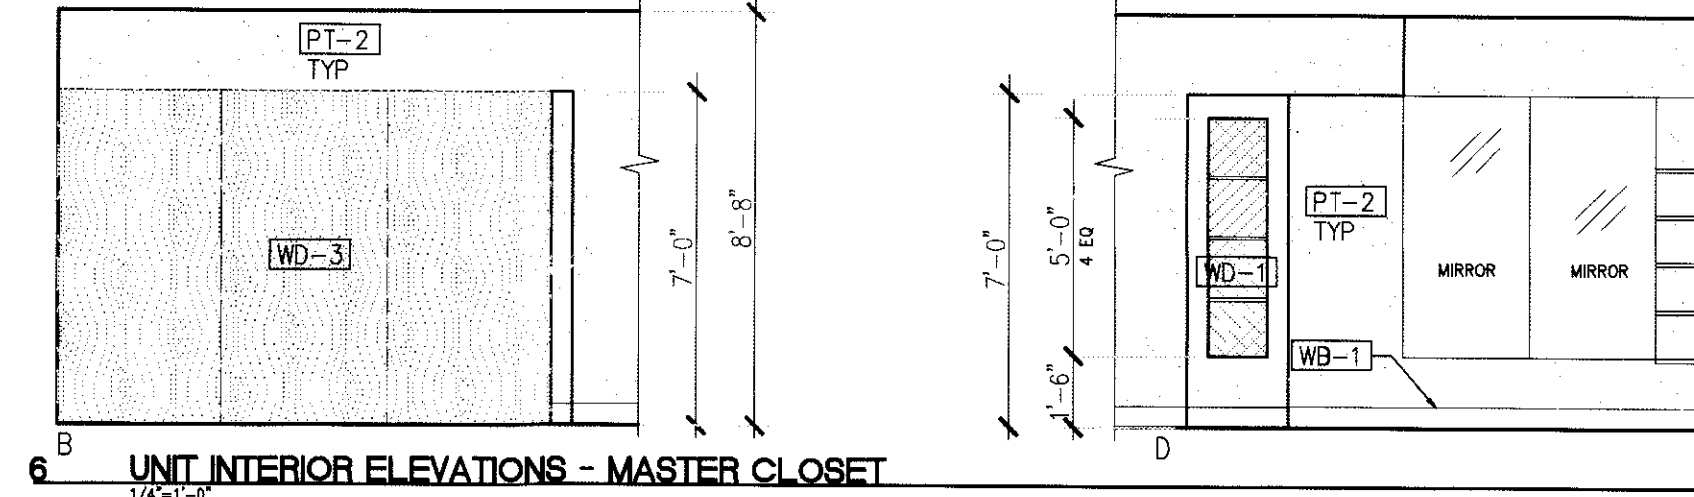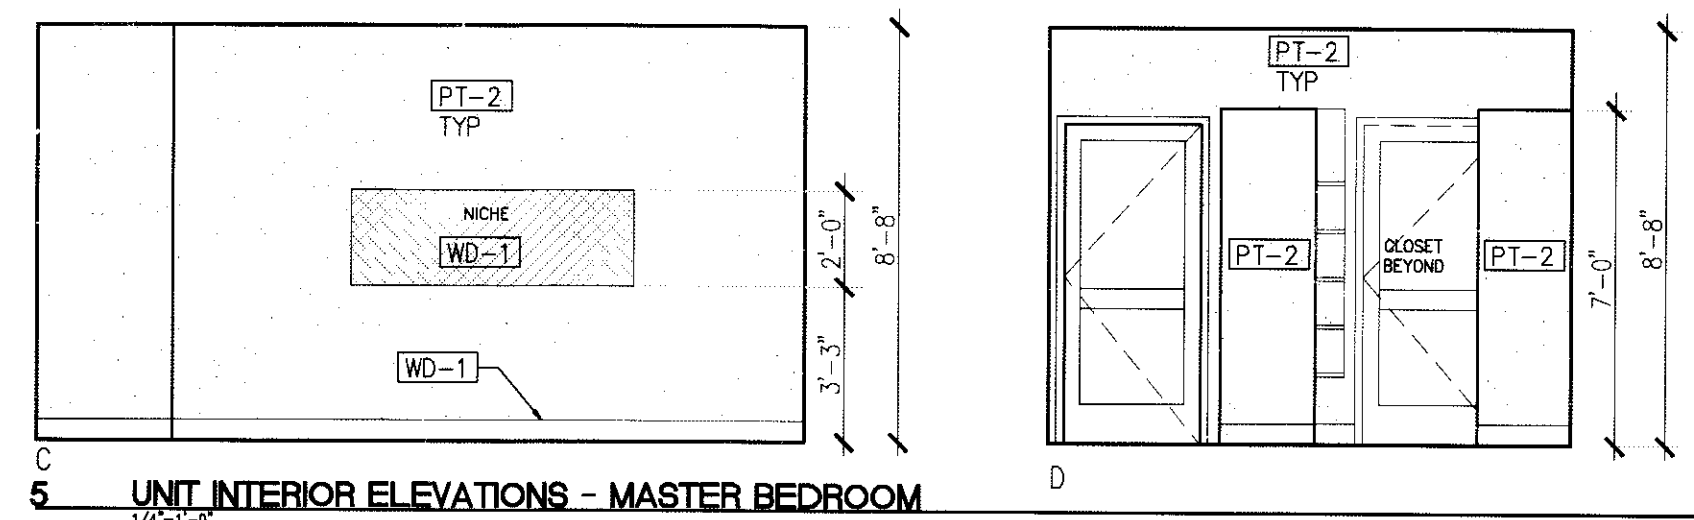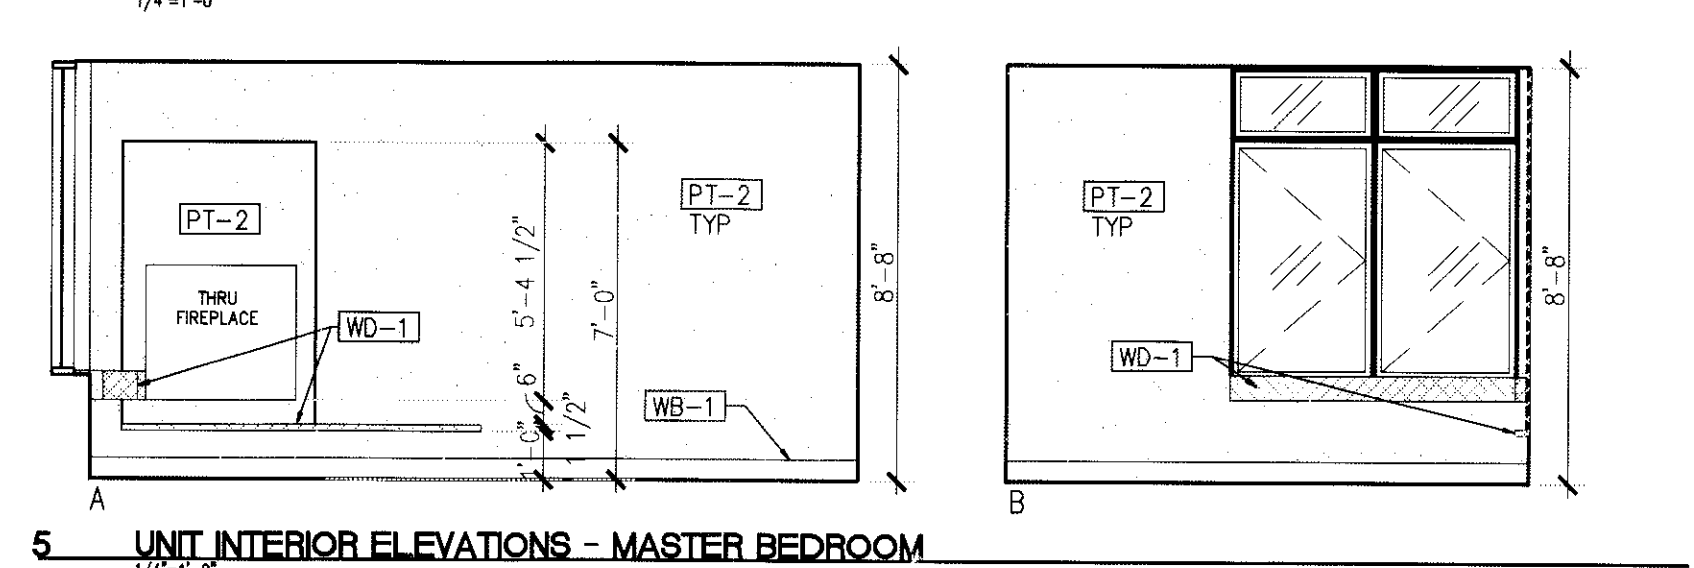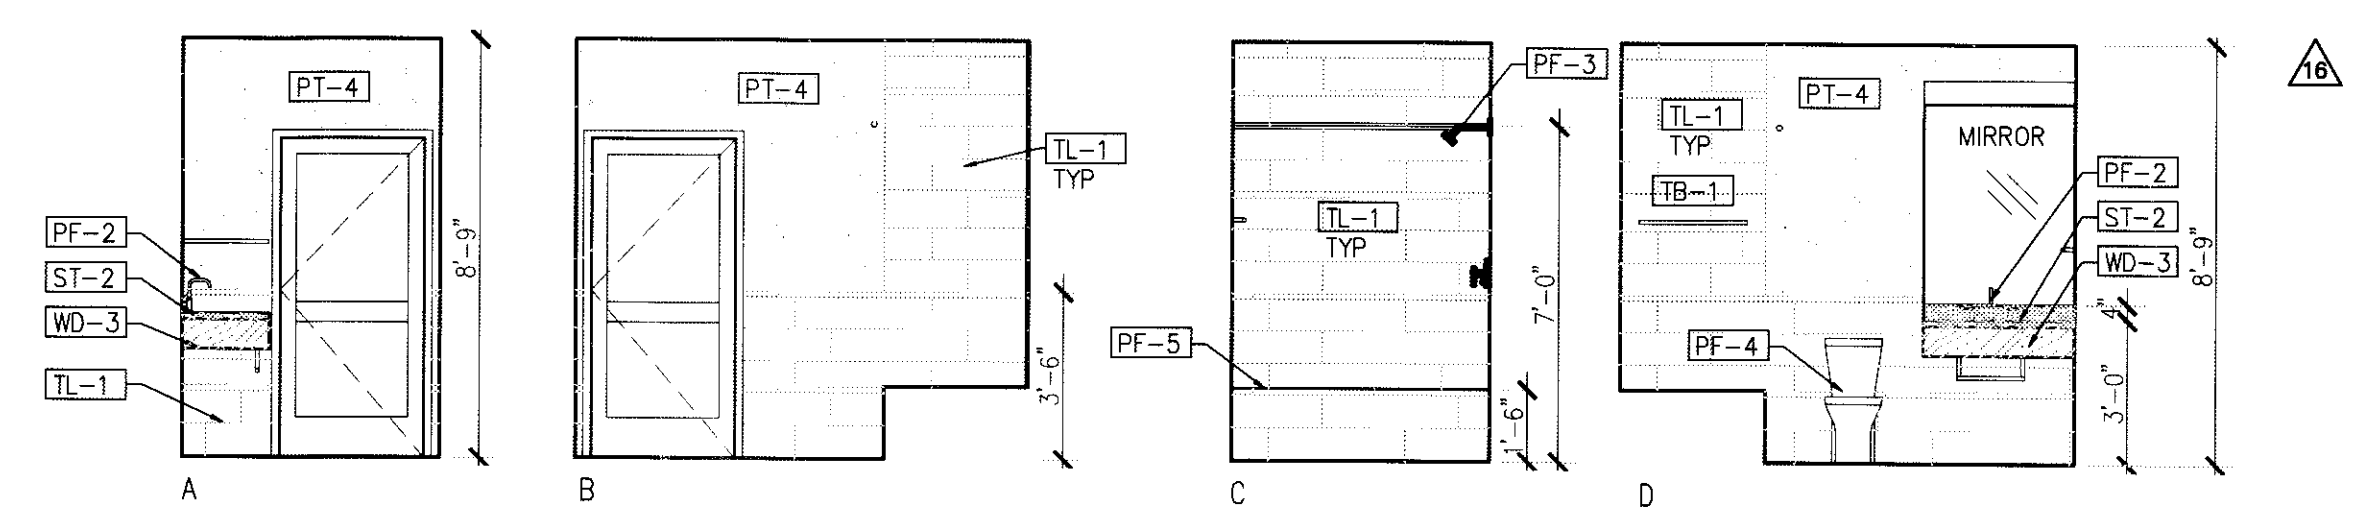

Umpqua

riverfront park llc
 designer: amy green
 503.438.5411
 amygreendesign@gmail.com

riverfront park llc
 contractor: ben schouten
 503.381.9522
 ben.scout@gmail.com

RIVERS CONDOS
 156 FRONT AVENUE
 SALEM, OREGON
 RIVERFRONT PARK LLC
 429 COURT ST. NE
 SALEM, OREGON 97301

Typ 03

UNIT FAIR HOUSING REVS 03.26.09
 UNIT TYPE-03 REVISIONS 03.05.09
 FIRE PLACE VENTING REV03.03.09
 UNIT DOOR CHANGES 02.11.09
 LEVEL 4 UNIT LAYOUTS 02.09.09
 UNIT 403 ELECTRICAL 02.05.09
 UNIT LAYOUTS 01.30.09

REFER TO SIENNA
 DRAWINGS FOR ADDITIONAL
 INFORMATION REGARDING
 SHELL CONSTRUCTION

Drawn By
 AMG
 Sheet Title
 LEVEL 4:

Date
 07.30.09

UNIT 403 LAYOUT

Sheet Scale
 AS SHOWN
 Sheet No.

A510